


Product sheet

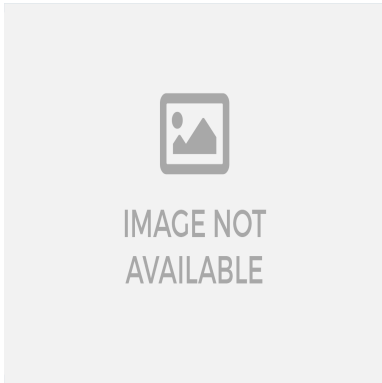

LEGRAND

T1+T2 surge arrester 8KA 1 pole+N NG

REF. 412243 | EAN. 3414970517685

> [Visit e-catalogue](#)

Product characteristics





- T1+T2
- 8 KA
- 1P+N NG

Recommendation / Restriction


- "To provide correct protection, a lightning arrester is recommended: - at the origin of each installation (mandatory depending on the type and location of the installation to be protected, - at the origin of divisional switchboards: secondary protection or fine protection of sensitive equipment, - on all outputs of external electrical circuits (supply to secondary buildings, external lighting or external electrical panels, etc.). A communication network arrester should always be installed to protect communication equipment in the presence of a lightning arrester on the low-voltage network."

Documentation


TECHNICAL DOCUMENTATION

-  F02060EN_05.pdf | PDF (0.62Mo)
-  F02060FR_06.pdf | PDF (0.61Mo)
-  EXB20026_TG_Surge_Protective_Devices_EN.pdf | PDF (8.37Mo)
-  LE07561AA_6.pdf | PDF (0.53Mo)



CAD & Design specs / BIM

-  412233.dwg | DWG (0.37Mo)

CATALOGUE PAGE & OTHERS

-  ex223001_0088-0089.pdf | PDF (0.16Mo)
-  ex223001_0087.pdf | PDF (0.12Mo)
-  ex223001_0085.pdf | PDF (0.07Mo)

Agreements & Certificates

-  LGRP-2015-068-V1-EN.pdf | PDF (0.62Mo)
-  OC / CB-AT 4283 | (0.27Mo)